


Sign Language Interpreter Glove

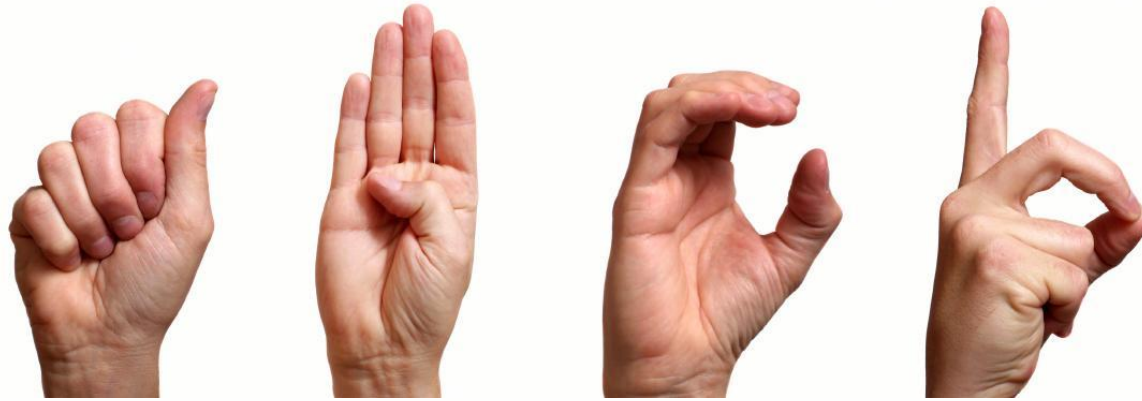

Group 24

Christopher Delgado
Emmanuel Hernandez
Jason Balog
Ramon Santana

Electrical Engineering
Electrical Engineering
Electrical Engineering
Electrical Engineering

Thank You to our generous sponsors!!!



Motivation

- The Survey of Income and Program Participation (SIPP) – estimates that about 1,000,000 are functionally deaf in the United States.
- The World Health Organization estimates that over 5% of the world's population – 360 million people – has disabling hearing loss (328 million adults and **32 million children**).
- The original motivation to pursue this project comes from one of our team members who has experienced the difficulty of communicating with his speech-impaired sister.



Goals and Objectives


- Our objective is to establish communication between a sign language speaker and a non-sign language speaker. Any letter the user signs will be displayed through a user interface where the non ASL-speaker can read the letter. We also want to implement a learning mode, where the user has the option to learn the American Sign Language letters.

Hardware

- Flex sensors
- Contact sensors
- Accelerometer
- Gyroscope
- MCU: ATmega328
- Bluetooth Low Energy

Software

- Android Mobile Application

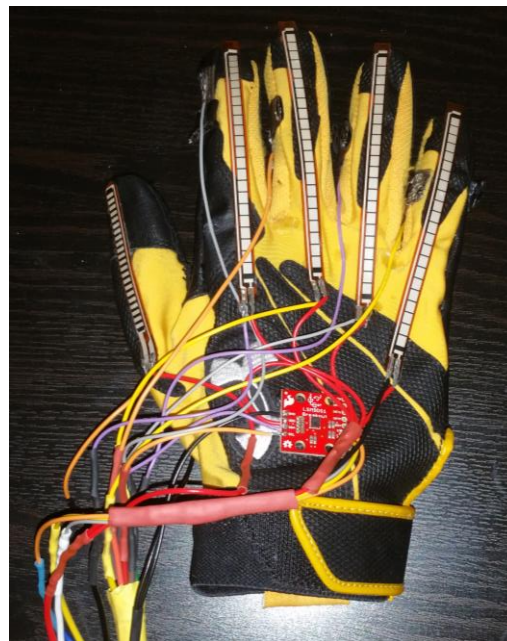

Specifications

- Lightweight
- Portable
- Energy Efficient

Glove Weight	< 1.5 lb.
Lithium Ion Battery	3.7 V 2000mAh
Battery Life	13 hours


Specifications Table






Related Standards

- IEEE Standards 802.15.1™-2005(Revision of IEEE Std 802.15.1-2002)
 - Establishes a communication standard optimized to serve a variety of medical and non-medical applications.
- Safety standards for Lithium-ion batteries (International Electrotechnical Commission (IEC) and International Organization for Standardization (ISO)).
 - IEC 62133-2: safety requirement for portable battery cells
 - IEC 62660: batteries for EV/HEV applications
 - IEC 61427: secondary cells and batteries for renewable energy storage
- Google's Android developers have set up a multitude of standards and qualification on the different aspects of an android application.
 - UX-B1: App uses common user interface patterns and conventional use of icons

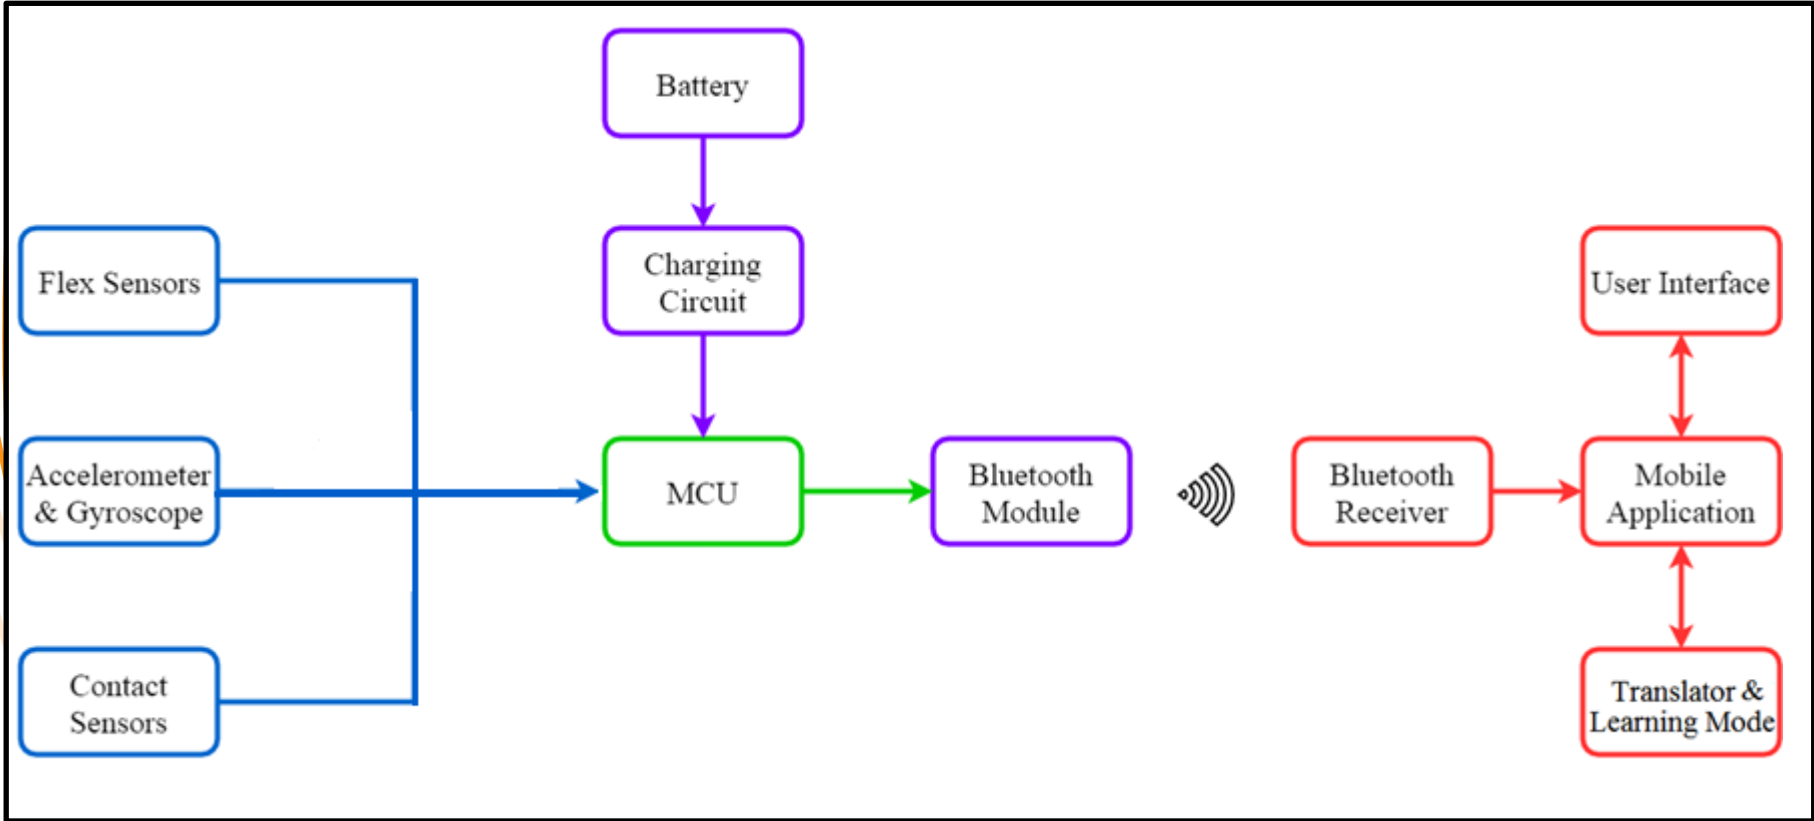Block Diagram





Significant Hardware Decisions - Wireless Communication

	 Bluetooth Low Energy	
Pros: <ul style="list-style-type: none">- Security (WPA2)- Range 150-300 feet	Pros: <ul style="list-style-type: none">- Range 20-120 feet- Consumes less power than Wi-Fi	Pros: <ul style="list-style-type: none">- Consumes less power than Bluetooth Low Energy
Cons: <ul style="list-style-type: none">- Needs Router- Consumes lots of Power- Not portable friendly	Cons: <ul style="list-style-type: none">- No cons for SLIG 😊	Cons: <ul style="list-style-type: none">- Limited Range (about 0-4 inches)




Significant Hardware Decisions - Battery & Regulators

- **Polymer Lithium Ion Battery - 2000mAh**
 - 3.7V at 2000mAh
 - Built-in protection against over voltage and over current
 - Self-discharge rate <8% per month
- **Regulators - TI LP2985**
 - The purpose of voltage regulators is to keep a constant voltage level
 - Dropout Voltage: 0.4 V
 - Output Voltage: 3.3 V

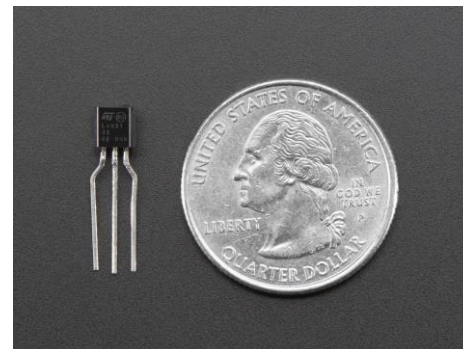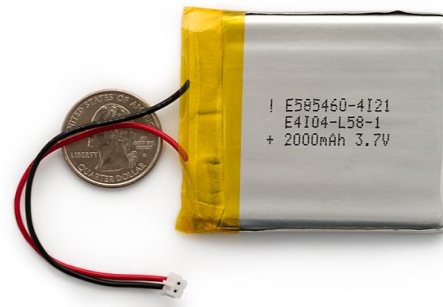


Significant Hardware Decisions - Charging

- **Charger input:**
 - Micro-USB
 - Charge current 500mA
- **Charger output:**
 - Single-Cell batteries Only
 - Lithium-Polymer or Lithium-Ion Only
 - Max Voltage: 4.2 V
- **Top challenges were:**
 - Learning how to solder small electronics

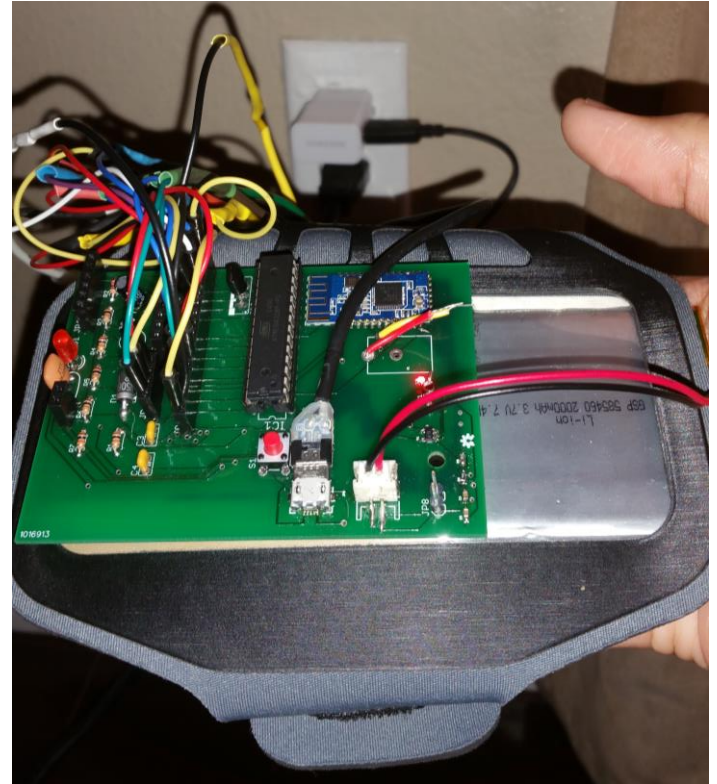

Significant Hardware Decisions – Flex Sensors

- Flex sensors will be the primary sensors employed in this projects.
- Flex sensors will be used to detect the degree to which each finger is bent on the hand performing the sign language gesture.
- Each letter will have a specific configuration based on expected outputs of the five flex sensors.

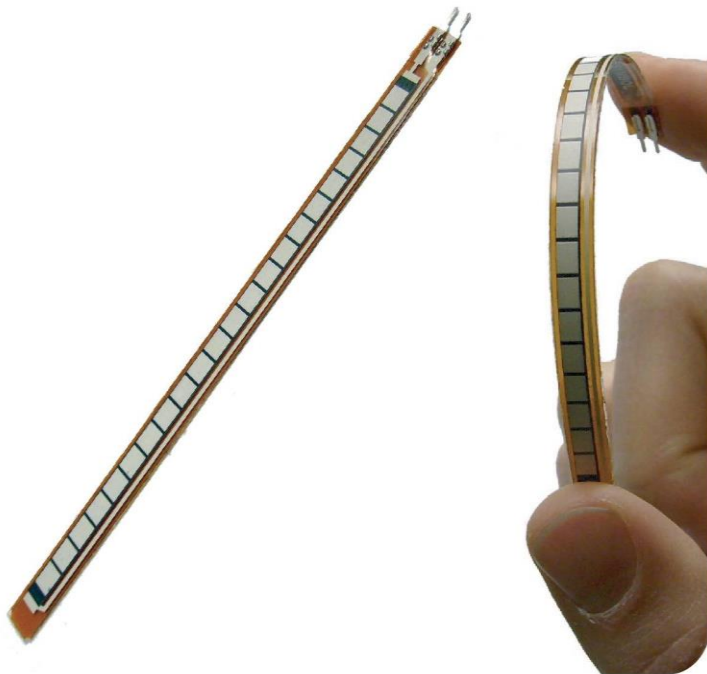


Significant Hardware Decisions – Flex Sensors

SpectraSymbol Long Flex Sensor	Images Two-Directional Bi-Flex Sensor	Tactilus Flex
Pros: <ul style="list-style-type: none">- widely available- accurate output	Pros: <ul style="list-style-type: none">- built in pressure sensors	Pros: <ul style="list-style-type: none">- claims high durability (>35 million cycles)- high quality leads
Cons: <ul style="list-style-type: none">- fragile leads	Cons: <ul style="list-style-type: none">- irregular shape- sold exclusively by manufacturer	Cons: <ul style="list-style-type: none">- increased cost- sold exclusively by manufacturer


Significant Hardware Decisions – Gyroscope and Accelerometer

- Accelerometers and gyroscopes can be used to measure these type of parameters, which are crucial in identifying certain sign language letters.
- Examples include "j" and "z" or distinguishing between "g" and "q".
- The group is using the SparkFun 9 Degrees of Freedom IMU Breakout - LSM9DS1.

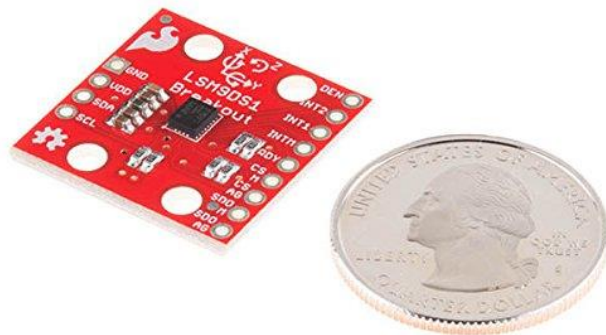


Significant Hardware Decisions – Contact Sensors

- Contact sensors were crucial in telling apart the following pairs of sign language: **R**, **U**, and **V**, **S** and **T** and **M** and **N**.
- The contact sensors were made with strips of copper braids that were connected to the power supply through wire leads.
- The glove detects when two contact sensors come in contact creating a closed circuit.

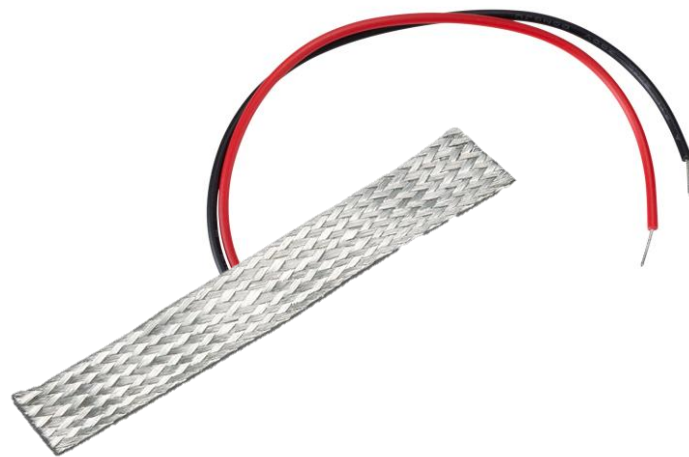


Significant Hardware Decisions – PCB

- The PCB was designed using Eagle CAD software and fabricated by Bay Area Circuits and most parts were sourced from Digikey.com
- It was designed as two layer board measuring 2.5" by 3.5" and is meant to be worn on the forearm.
- Designing and building the PCB board was the biggest challenge with the hardware.
- Top challenges were:
 - Learning Eagle CAD
 - Correctly Wiring Components
 - Ordering the write components

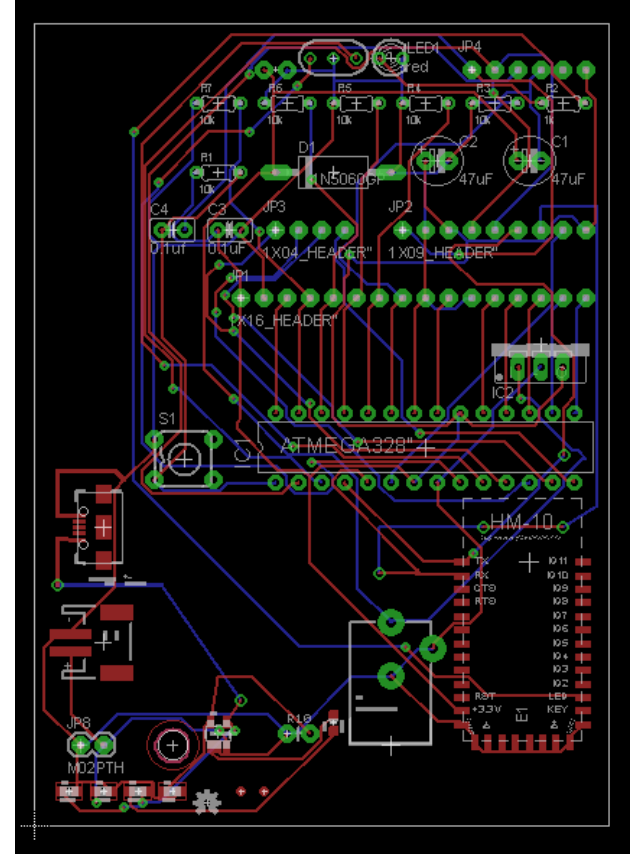

Significant Hardware Decisions – PCB

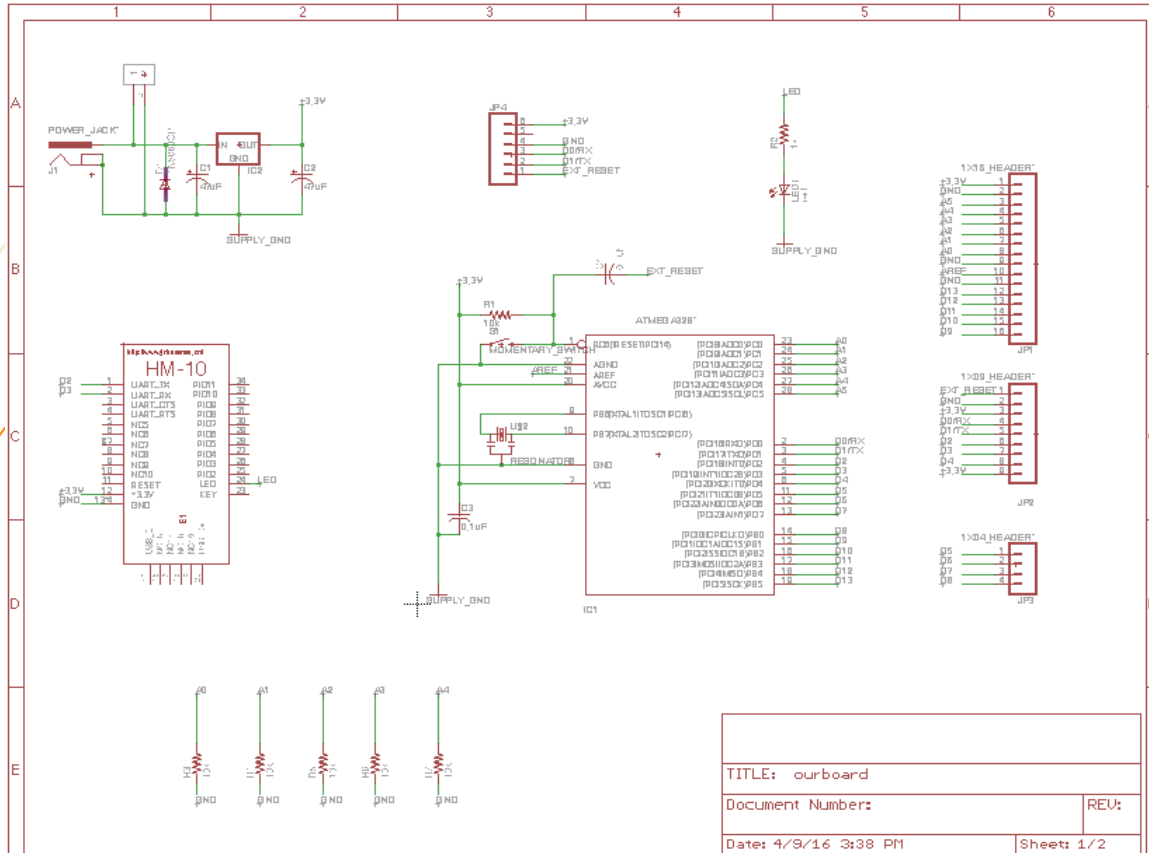

Significant Hardware Decisions – Microcontroller


- The unit that is chosen will have to employ at least 6 analog input pins (with included ADC units), have digital i/o pins, and also be able to establish a line of serial communication.
- When considering the microcontroller unit, it is also important to note that the two units come with their own native programming environments.

Table 3.2: MSP430 vs. ATmega32 comparison

Feature	MSP430	ATmega32
Analog Input Pins	8	12
Digital Input Pins	8	20
Random Access Memory	512 Bytes	2.5 Kilobytes
Data Bus	16 bits	8 bits
Speed	16 MHz	16 MHz
Cost/Vendor	\$9.99 → mouser.com	\$24.95 → ebay.com


Gesture Recognition Software

- The gesture recognition system will use thresholds to determine what hand gesture is being performed.
- The ranges of values that are included in every type of hand gesture determine the minimum and maximum limits to the conditional statements.

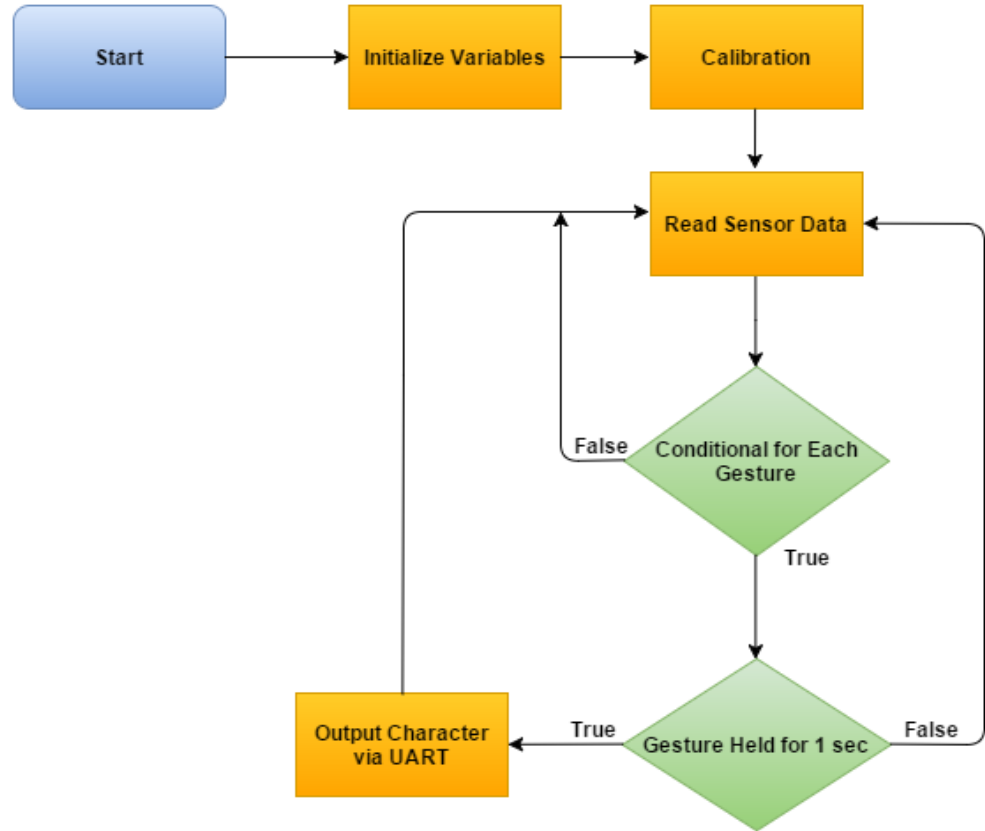

Calibration Process

- The calibration process occurs during the 'setup' process of the program, before the infinite loop begins
- Calibration will capture the minimum and maximum input values from each sensor, and apply the mapping function.
- Calibration is needed because analog flex sensors provide volatile data that needs to be normalized.

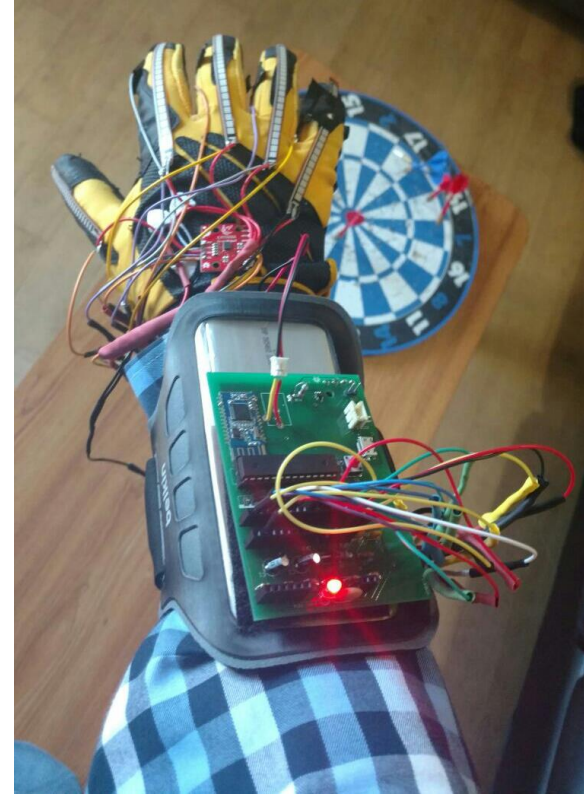


Gesture Recognition Software

- Program scans sensors for data at one second intervals
- Arduino “map” function is used to apply calibration
- Normalized sensor values and motion data are used in conditional statements that determine gesture being performed




Gesture Recognition Set-Backs

- Contact sensors needed to have internal pull-up resistors enabled due to floating i/o pins
- Had to use SPI as opposed to I2C for the motion unit due to a lack of enough analog input pins
- Many distinct gestures unexpectedly produced similar flex sensor data and required methods of distinction

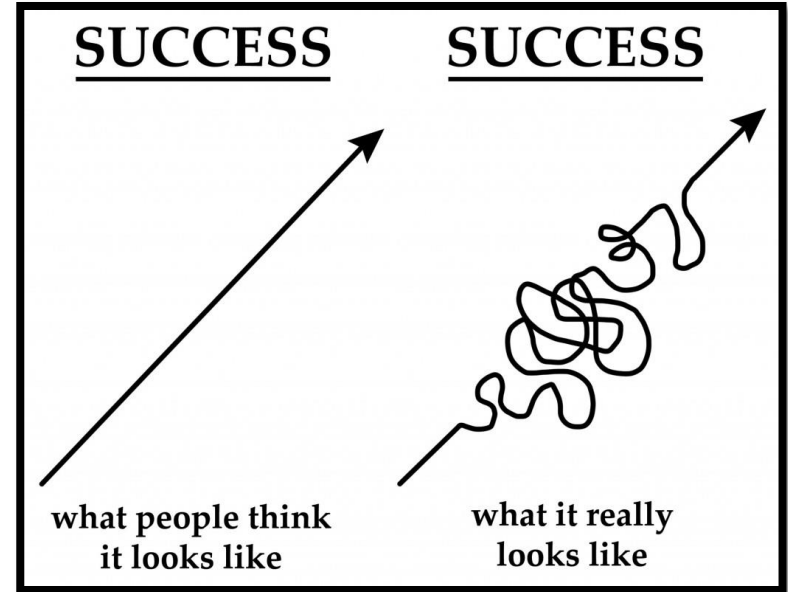

Software Components: Mobile Application

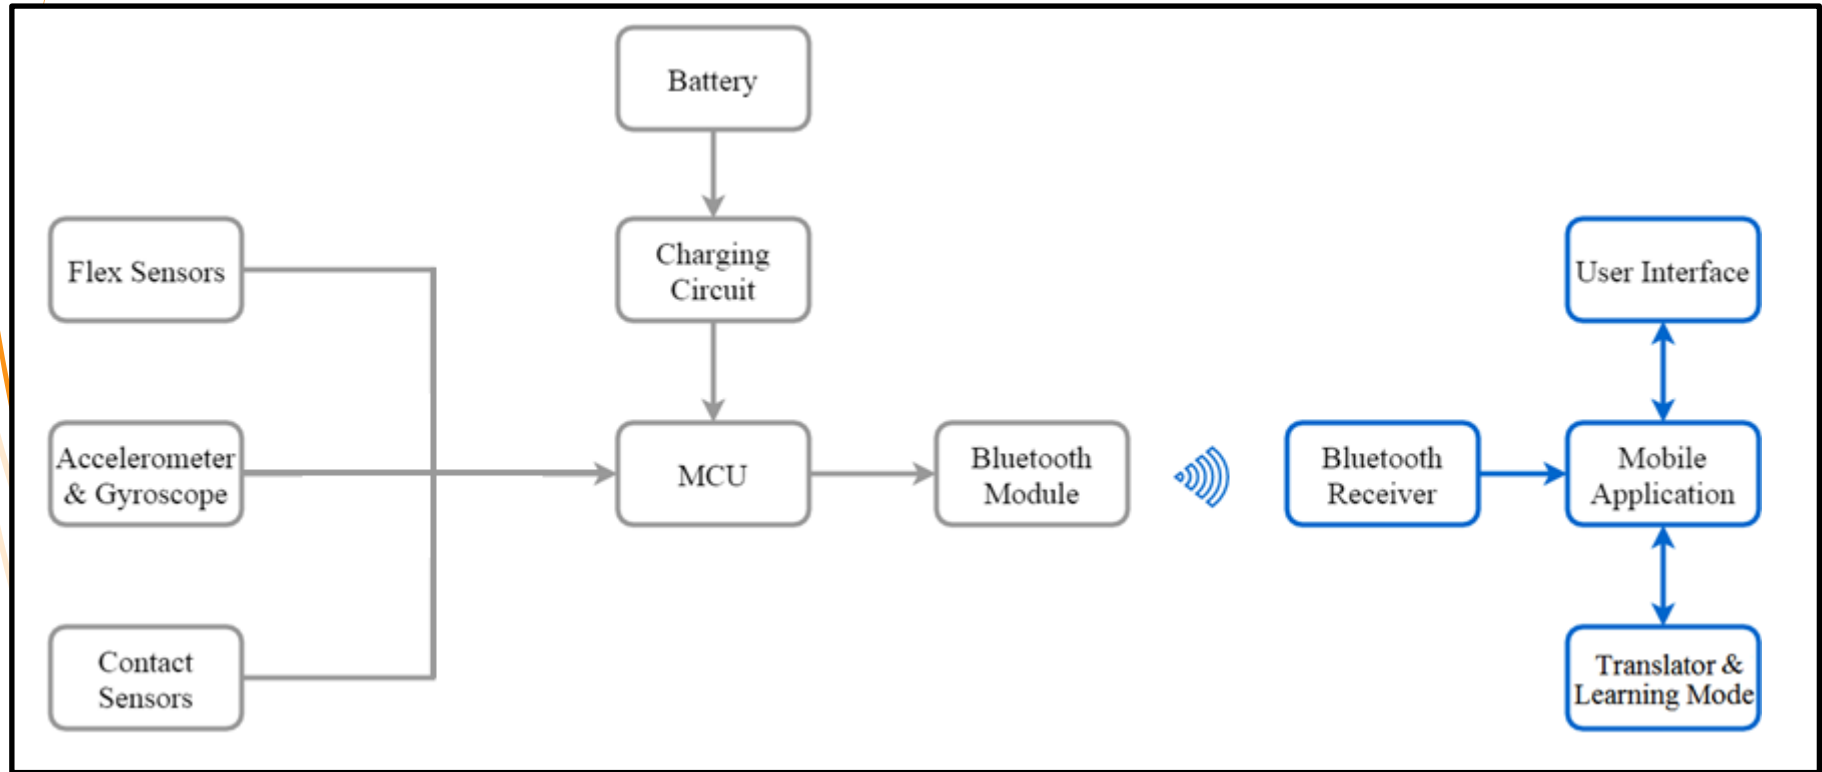

Mobile Application: Overview

- The mobile application is an important feature of this project that will serve as the user interface for the sign language glove.
- The mobile application is responsible for wirelessly displaying hand gestures performed by the glove onto a mobile phone screen as text.
- In order for the mobile application to be successful, the design of the app should consider the user, be simple and elegant, and meet all design requirements.



Potential Mobile Platforms

- **Android**
 - Programming language: Java
 - IDE: Android Studio
 - Open source and cross-platform compatible
 - BLE compatible
 - Everyone in our group owns one!
- **iOS**
 - Programming Languages: Swift or Objective-C
 - IDE: Xcode
 - Only Mac OS compatible
 - BLE compatible
- **Windows**
 - Programming Languages: C++, C#, and Visual Basic
 - IDE: Visual Studio
 - BLE compatible




Android


Minimum Requirements	
Device Type	Android
Mobile Platform	Smartphone
Bluetooth Version	Bluetooth Low Energy v4.0
Platform Version	Android 4.3
Codename	Jelly Bean-MR2
Android API Level	18





Mobile App Flowchart

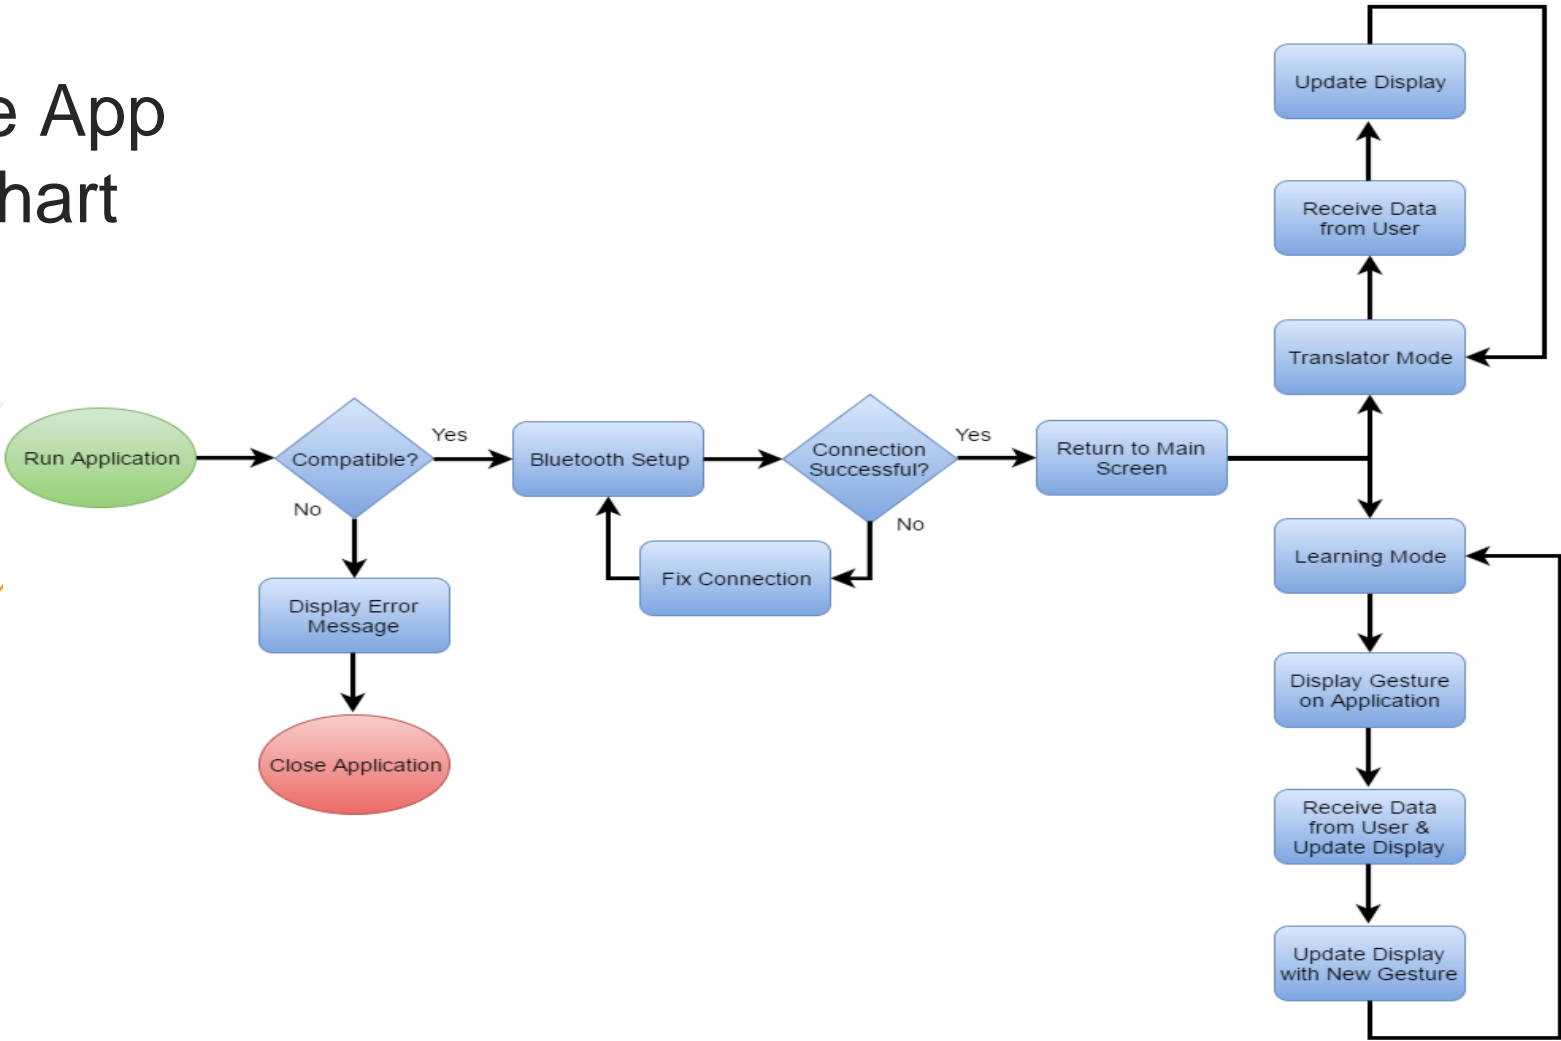

User Interface

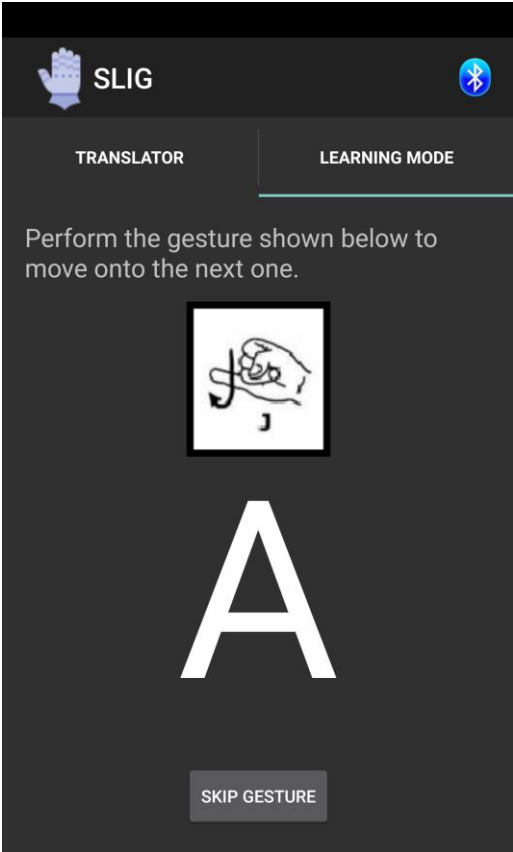

User Interface

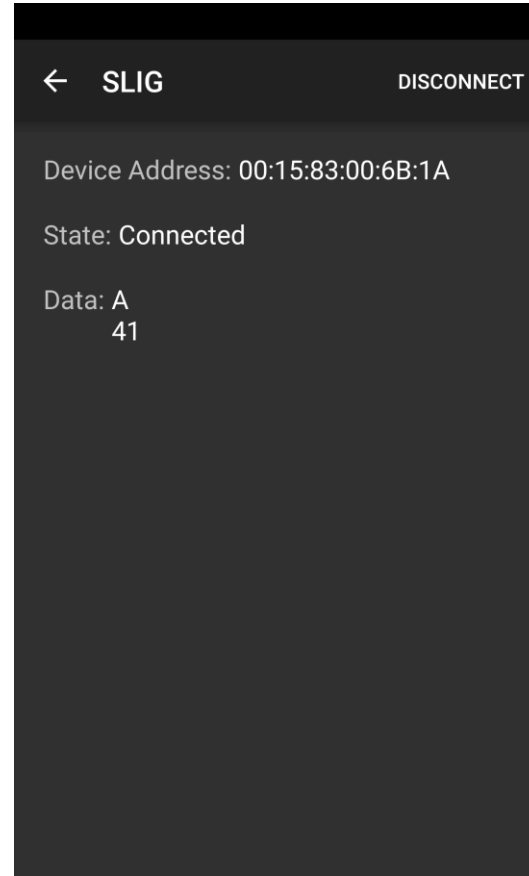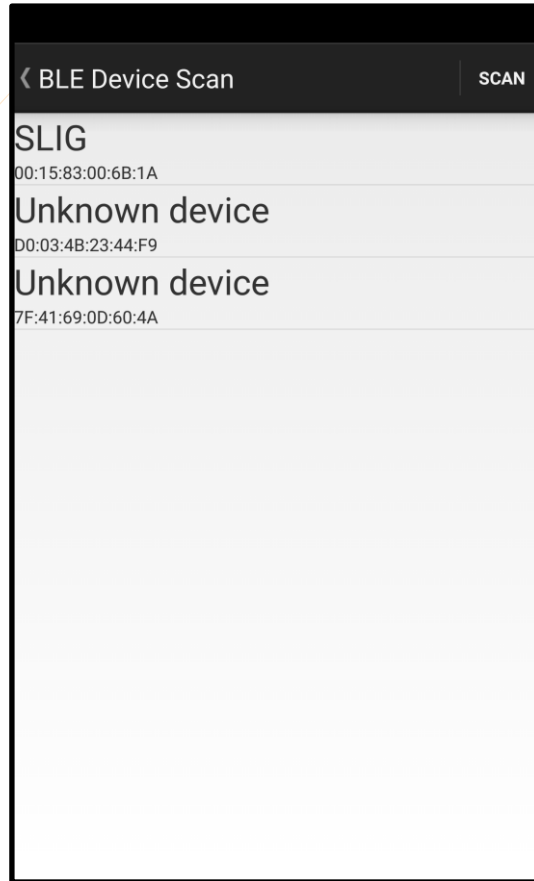

Budget And Financing

- **Sponsored by:** Boeing and Leidos
- **Initial Budget Estimate:** \$550
- **Final Project Cost:** \$825



Part Description	Price per Unit (\$)	Quantity	Cost (\$)
Flex sensors 4.5"	\$12.95	15	\$194.25
Flex sensors 2.2"	\$7.95	1	\$7.95
Development Board	\$20.87	3	\$62.61
ATmega328P	\$13.99	3	\$41.97
Bluetooth Module	\$11.29	4	\$45.16
Accelerometer & Gyroscope	\$29.55	2	\$59.10
Battery	\$22.20	1	\$22.20
PCB	\$49.60	1	\$49.60
PCB Components	\$49.76	1	\$49.76
2nd PCB Components	\$52.99	1	\$52.99
3rd PCB Components	\$34.08	1	\$34.08
Glove and Wristband	\$20.22	2	\$40.44
Glove and Armband	\$45.00	1	\$45.00
Soldering Materials et al	\$120.00	1	\$120.00
Total cost	-	-	825.11
Boeing & Leidos sponsorship	-	-	\$359.80
Difference			\$465.31

Questions ?

