

# 3D User Interface Hardware


Lecture #6: Audio/Haptic Displays  
Spring 2010  
Joseph J. LaViola Jr.

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Interaction Workflow

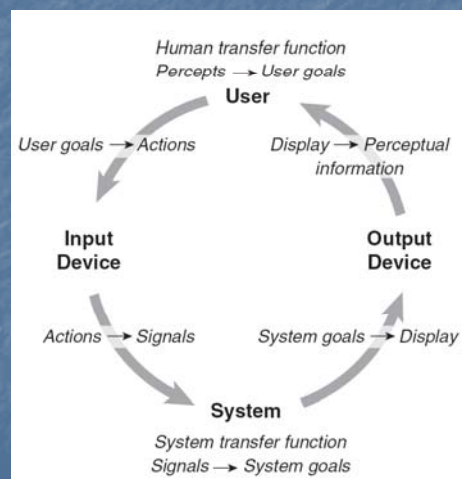

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Introduction To Displays

- *Display*: device which presents perceptual information
- Goal: display devices which accurately represent perceptions in simulated world
- Displays do not have to be just visual
  - auditory
  - haptic, tactile
  - olfactory

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Lecture Outline

- Audio Displays
  - 3D sound localization depth cues
  - 3D sound generation
  - sound configurations
  - audio and 3DUIs
- Haptic/Tactile Displays
  - haptic cues
  - display characteristics
  - display types
  - haptics and 3DUIs
- Olfactory Displays

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Audio Displays

- Present sound to the user
- Spatialized 3D sound
  - sound surrounds user
  - take advantage of localization
- Localization – psychoacoustic process of determining location and direction from which a sound emanates
- Many applications



<http://www.loonygames.com/content/2.4/feat/>


Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## 3D Sound Localization – Binaural Cues

- Comparison of sound waves received by each ear
- Interaural time difference – time between arrival of sound at each ear
- Interaural intensity difference – difference in sound intensity at each ear
- Cue does have problems
  - ambiguous situations
  - when two or more sources where ITD and IID are the same

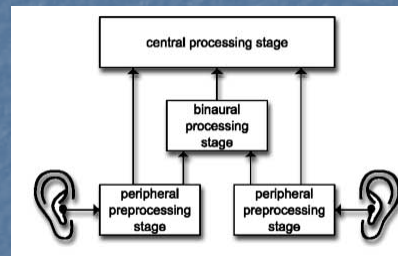

[http://www.jeroenbreebaart.com/research\\_binaural.htm](http://www.jeroenbreebaart.com/research_binaural.htm)

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## 3D Sound Localization – Spectral and Dynamic Cues

- Dynamic head movement or sound source
  - moving source is fairly weak cue
- Utilize spectral content
  - interaction of sound wave with outer ear
  - occur at relatively high frequencies (above 6KHz)


Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## 3D Sound Localization – Head Related Transfer Functions

- Spatial filters that describe how sound waves interact with listener's body
  - listener specific
  - lack reverberation info
- Build in echo free chamber with head model



<http://www.tonmeister.ca/main/textbook/node320.html>

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.



## 3D Sound Localization – Reverberation

- Many factors affect a sound source
  - objects
  - atmospheric properties
- Sound hits listener directly and indirectly
- Aids in perception of distance, not direction

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## 3D Sound Localization – Others

- Intensity (i.e., loudness)
  - simple cue
  - common in 3D audio displays
- Vision and Environment
  - sounds in FOV make spatial percepts

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# 3D Sound Generation

- 3D sound sampling and synthesis
  - take samples from real environment
  - binaural audio recording
  - generate HRTFs for each ear
- Auralization
  - rendering a sound field
  - good for reverberation effects
  - wave-based modeling
  - ray-based modeling

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Sound System Configurations

- Headphones (stereophonic)
  - High level of channel separation
  - avoid crosstalk
  - isolate listener from external sounds
  - problems with inside the head localization
- External Speakers
  - place speakers around the room
  - no need to wear anything
  - problems with crosstalk
  - Two approaches –transaural audio and amplitude panning

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Audio in 3DUIs

- Localization
  - wayfinding aids
- Sonfication
  - turning information into sounds
- Ambient Effects
  - adding realism
- Sensory Substitution
  - sound for touch
- Annotation and Help

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Haptic Displays

- Provide user with sense of touch
  - simulate interaction between virtual objects and user
  - force (joint/muscle)
  - tactile (skin-based)



[www.novint.com](http://www.novint.com)

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Haptic Cues – Tactile Cues

- Taction – perceived by variety of cutaneous receptors under skin surface
  - surface texture
  - temperature
  - pressure
  - pain
- Found in varying concentrations on the body

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Haptic Cues – Kinesthetic Cues

- Perceived by receptors in muscles, joints and tendons
  - help to determine movement, position and torque of different body parts
  - relationship between user and object via muscular tension
- Both active (movement self-induced) and passive (movement by external force)

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.



## Haptic Display Characteristics

- Presentation capability – what types of output
- Resolution
  - Spatial – minimum proximity of stimuli
  - Temporal – refresh rate
- Ergonomics
  - Don't want to break anyone

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Haptic and Tactile Displays

- “For every action there is an equal and opposite reaction”
  - Sir Isaac Newton
- Main forms of feedback
  - ground referenced
  - body referenced
  - tactile
  - combination
  - passive – physical props



Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Haptic Displays

- Motionware device
- Provides vestibular stimulation
- Sends signals to the 8<sup>th</sup> cranial nerve
- Gives user a sense of motion
- No longer exists





Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Other Haptic Devices

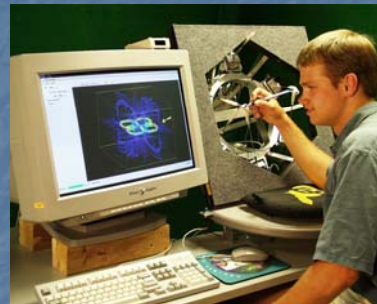


Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# PainPong

- PainStation
  - two person console
  - electro shock, heat, whipping: bad performance → pain

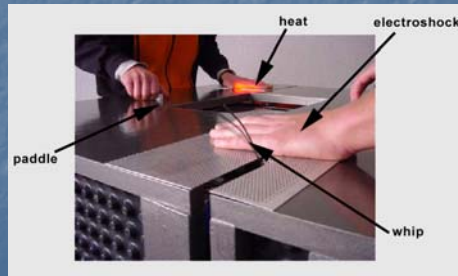

PainStation - Pong  
Courtesy of [www.painstation.de](http://www.painstation.de)

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Hall of Pain ([www.painstation.de](http://www.painstation.de))



Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.



## Haptics – Interface Design

- Useful for object manipulation
- Problem with these devices is they are very intimidating
- Mimic real world interaction
- Untapped area for games
  - scary too!!



Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Olfactory Output

- Least developed area
  - maybe for good reason!
- Has practical applications
  - fire fighting
  - surgical training
- Number of practical problems

Spring 2010

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.



# Next Class

- Input devices
- Readings
  - 3DUI Book – Chapter 3, pages 59-86